


NUFLEX FLEXIBLE BRAKE DRUM GEAR COUPLING (FBD)

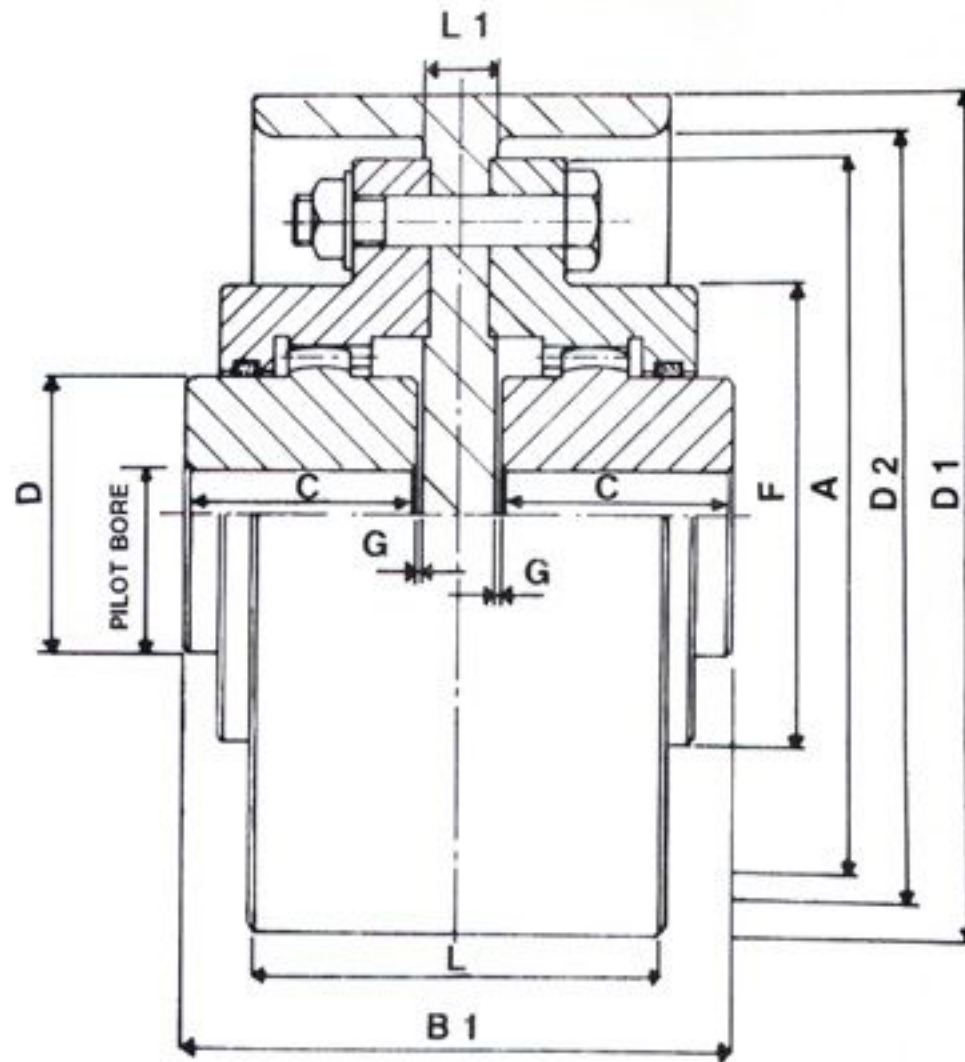

NU-TECK G. C. NO.	MAX. TORQUE Kgm.	PILOT BORE	DIMENSION IN mm									
			D1	D2	L	L1	B1	A	C	D	F	G
G.C. 101 - 200 - FBD	100	20	200	180	100	17	130	170	55	65	110	1.5
G.C. 101 - 250 - FBD	100	20	250	224	100	17	130	170	55	65	110	1.5
G.C. 102 - 250 - FBD	250	30	250	224	100	17	160	185	70	85	125	1.5
G.C. 103 - 250 - FBD	450	40	250	224	100	20	193	220	85	105	150	1.5
G.C. 103 - 300 - FBD	450	40	300	276	150	20	193	220	85	105	150	1.5
G.C. 104 - 300 - FBD	850	50	300	276	150	20	233	250	105	130	175	1.5
G.C. 105 - 330 - FBD	1300	60	330	300	150	25	253	290	110	155	200	4
G.C. 105 - 500 - FBD	1300	60	500	470	250	25	253	290	110	155	200	4

Manufactured by

NU-TECK COUPLINGS LIMITED

REGD. OFFICE & WORKS :

B-1, C-13, BHOSARI INDUSTRIAL ESTATE, P. B. NO. 14,

PUNE - 411 026 (INDIA) • TEL. (0212) 790103, 790104, 791289

• TELEX : 0146-262 NT IN • FAX : 91-212-791223, GRAM : NUTECK

